RED	DC VOLTAGE
BLUE	INPUT SIGNALS
BLACK	GROUNDS, SHIELDS AND RETURNS
PURPLE	OUTPUT SIGNALS
GREEN	DATALINKS

REPRESENTS FEMALE PIN
REPRESENTS MALE PIN
REPRESENTS TWISTED PAIR
REPRESENTS SHIELD

NOTE: 1 SOME OF THE CIRCUITS SHOWN HERE WILL NOT BE ACTIVE IN ALL APPLICATIONS. CONSULT THE EQUIPMENT MANUFACTURER'S LITERATURE TO DETERMINE WHICH CIRCUITS ARE USED.

NOTE 2: MAY BE EITHER INCREMENT OR DECREMENT DEPENDING ON THE VALUE OF THE ECM ADJUSTABLE PARAMETER "CRUISE CONTROL SETUP".

OEM RESPONSIBILITY

CUMMINS RESPONSIBILITY

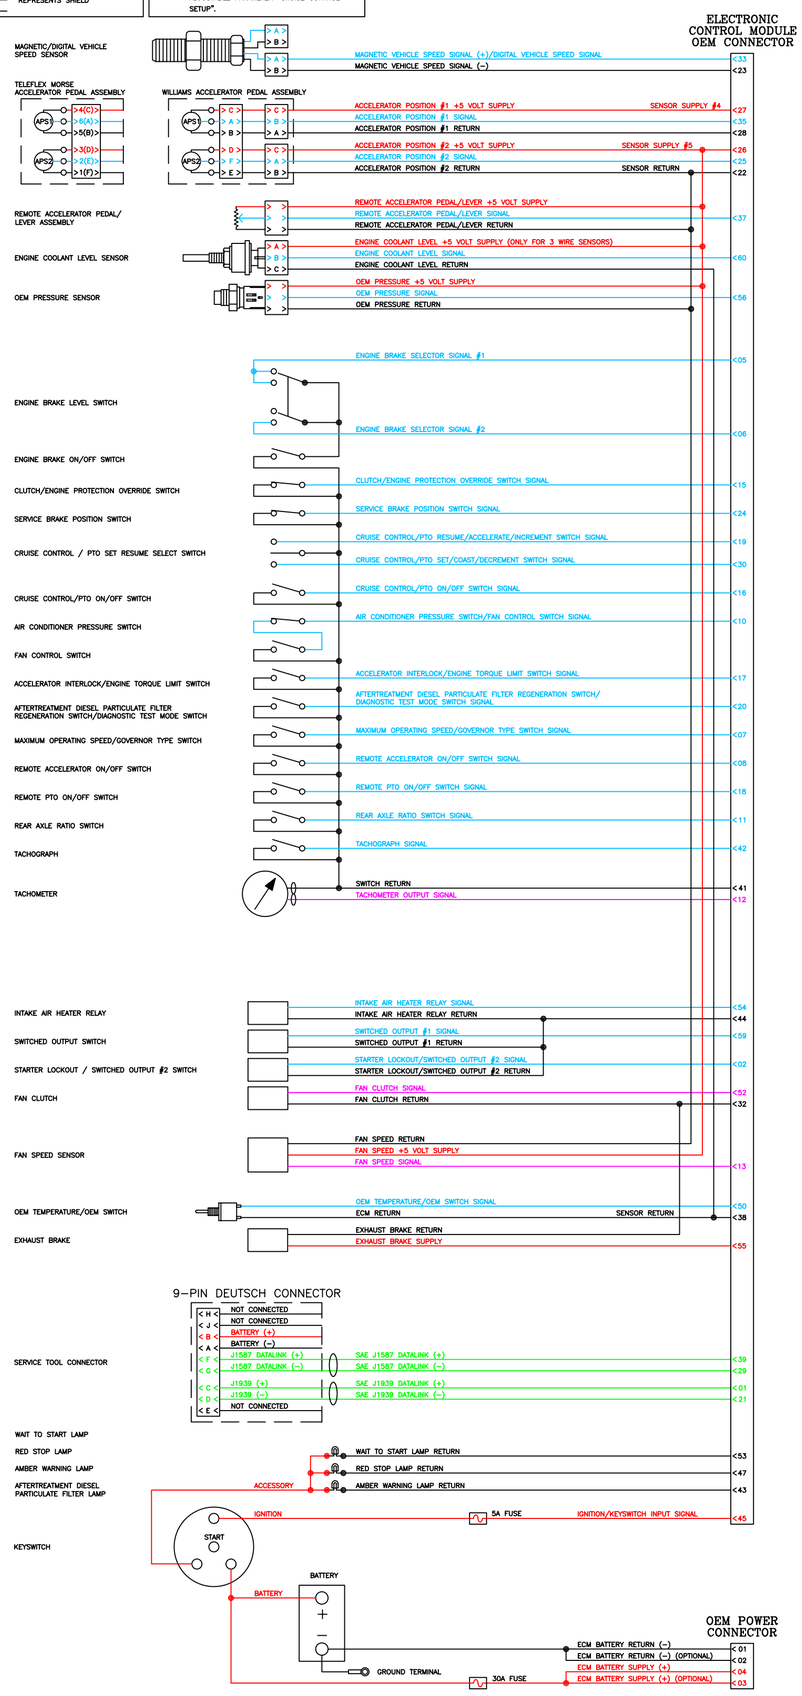

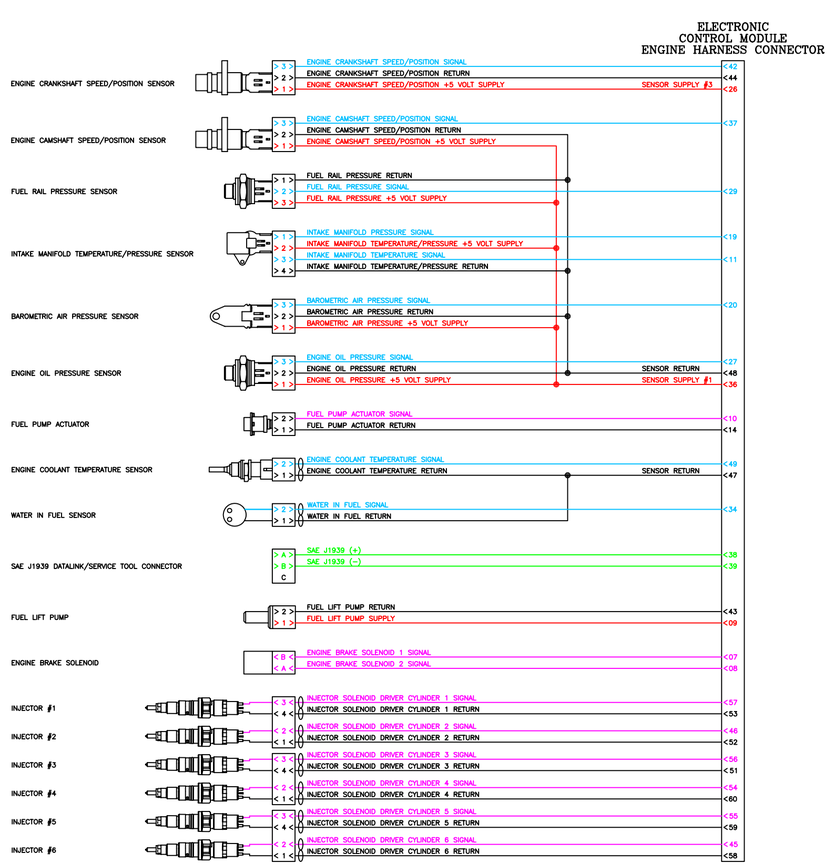





















CUMMINS CONFIDENTIAL

DRAFT COPY

PROOF COPY

10/3/06

ISLe with CM2150 Control Module Wiring Diagram

Bulletin 4021626

Cummins Inc.

OEM RESPONSIBILITY

CUMMINS RESPONSIBILITY